



DALS LIGHTING



Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL **CFLEDR18-CC**
NAME **DELTA SERIES**
18" Round Flush Mount

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and includes five switch-selectable CCT settings.

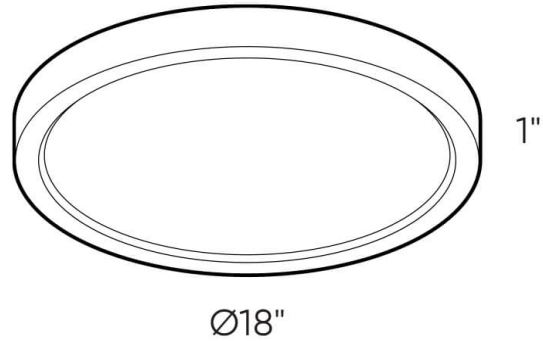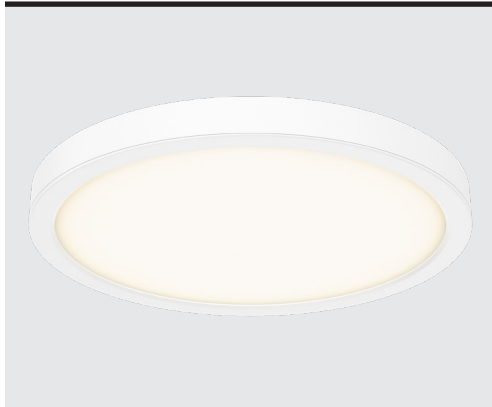


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
18"	30W	2100lm	2700K 3000K 3500K 4000K 5000K	90	120V	110°	Straight	☐ White ☒ Black ☐ Satin nickel

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION

Lens
Frosted

Lens material
PC

Finish type
Paint (BK, WH)
Electroplate (SN)

Housing material
Cast aluminum

Type of LED
Edge lit SMD

Mounting
Twist bracket

RATINGS

Placement
Indoor/outdoor

Location
Wet (Covered ceiling
mounted only)

Lifespan
50,000 hrs.

Certifications
ETL, JA8, FCC, ES

IP rating
IP44

Operating temperature
-20° to 40° C

WHAT'S IN THE BOX

LED flush mount fixture
Mounting bracket
Mounting hardware
Wire nuts
Instruction sheet

ACCESSORIES

-

ADAPTERS

-


**ELECTRICAL
DETAILS**
Input voltage
 108-120V

Output current
 238mA

Power factor
 90%

Driver type
 Constant current

Output voltage
 126V

LED model #
 2835

**THD harmonic
distortion**
 <30%

Binning type
 3 SDCM

FEATURES

 Integrated dimmable
driver

 Smooth 360° wide
spread

 Switch-selectable CCT:
 2700K/ 3000 K/ 3500 K/
 4000 K/ 5000 K

 Superior LED
performance and
lifespan

Minimal heat emission

Edge-lit technology

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	0	100	8
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	98	5
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	97	5
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	90	5
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	98	5
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	90	5
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0	76	10
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 150W Dimmable CFL/LED	Compatible	0	87	5
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	0	97	8
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	0	89	8
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	5	93	5
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	1	92	15
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	5
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	5
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	5
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0	100	10
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	0	72	15
Legrand	RHL373PW	Triac, 250W LED	Compatible	0	87	8
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	4
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	100	7

* Minimal buzzing noise may occur with some dimmers