



The Advance Xitanium range of linear LED drivers is designed to provide OEMs with ultimate flexibility. These models are compatible with standard 0-10V dimming systems to deliver reliably smooth dimming performance down to a minimum of 1%. Enabled with SimpleSet technology, these drivers offer the needed flexibility and performance for the application with precise tuning of drive currents, selectable dimming curves and adjustable minimum dimming levels. With wide operating windows, slim profile and simple current adjustability, the drivers make it easy for luminaire manufacturers to design linear fixtures with desired lumen levels to suit the application.


### Specifications

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Max Case Temp. (°C) Life/UL	Input Current (A)	Max Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protect (Combi Wave, KV)	Dimming	Dimming Range (%)	Min Dimming Current (mA)	Drive Type
120	85	10-54	0.7-2.4	87.5	85 / 90	0.83	97.1	<10	>0.95	6	0-10V	1-100	7	CC
277				89.5		0.36		<15						


### Enclosure

Item	In(mm)	Tolerance (mm)
Overall length (A1)	16.69(424)	+/-0.5
Mounting Length (A2)	16.34(415)	+/-0.5
Case Length (A3)	14.49(368)	+/-0.5
Case Width (B1)	1.2(30.5)	+/-0.5
Case Height (C1)	1.02(25.8)	+/-1
Mounting Hole Diameter (D1)	0.31(7.9)	+/-0.3
Center of SimpleSet antenna (G1)	0.76(19.4)	+/-3

### Mechanical Diagram

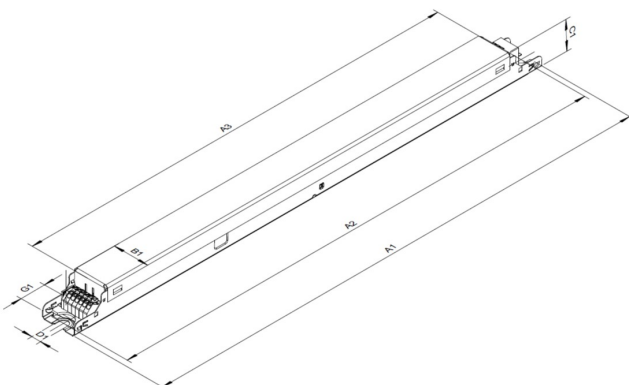

### Wiring Diagram

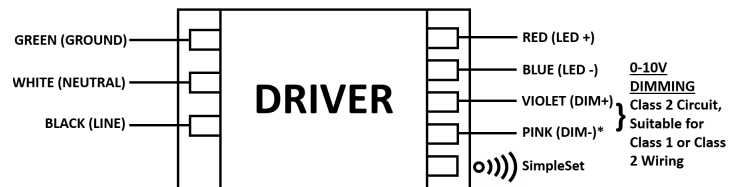

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.
- Use 18 AWG Solid Copper Wire Rated  $\geq 90$  °C.
- Strip Wire 3/8".
- For Class 2 Wiring, Use 20 AWG-16 AWG.
- Driver case must be grounded.

# XI085C240V054BST2

## Features

- 50,000+ hour lifetime
- SimpleSet programmable
- Large operating window
- 1% minimum dim level
- Constant Current Reduction (CCR) Dimming

## Benefits

- Slim profile housing enables easy design-in with excellent thermal performance
- Enables simple, fast, flexible application-specific configurations
- Enables fixture designs with comprehensive application coverage for various loads and lumen levels

## Application

- Indoor linear applications
- Office, Healthcare & Education
- Warehouse & Industrial Applications
- Highbay & Midbay Applications

## Logistical data

Specification item	Value
Product name	XI085C240V054BST2
EOC	XI085C240V054BST2
Logistic code 12NC	9290 027 74613
Product code	XI085C240V054BST2M
Pieces per box	12
Weight	495 gram

All the specifications are typical and at  $T_{\text{ambient}} = 25^{\circ}\text{C}$  unless specified otherwise

## Electrical input data

Specification item	Value	Value	Unit	Condition
Rated input voltage range	108...305		$V_{\text{ac}}$	Performance range
Rated input voltage	120	277	$V_{\text{ac}}$	
Rated input frequency	50...60	50...60	Hz	Performance range
Rated input current	0.83	0.36	A	@ rated output power @ rated input voltage
Rated input power	97.1	95.0	W	@ rated output power @ rated input voltage
Efficiency	87.5	89.5	%	@ rated output power @ rated input voltage

## Electrical output data

Specification item	Value	Unit	Condition
Output voltage	10...54	$V_{\text{dc}}$	Class 2 Output
Output voltage max.	60	V	Open Circuit Voltage
Output current	700...2400	mA	
Output current min programmable	700	mA	
Min output current	7	mA	
Output current tolerance $\pm$	5	%	within performance window
Output current ripple LF	$\leq 15$	%	Ripple = peak / average, < 3kHz
Output power	0.1...85.0	W	
Minimum performance output power	35	W	Power factor > 0.9 and THD < 20%

# XI085C240V054BST2

## Control interfaces

Specification item	Value	Unit	Condition
Control method	0-10V		
Dimming range	1...100	%	Default range
Dimming Source Current	0.15	mA	
Maximum Dimming Voltage	12	V	
Dimming Leakage Current	0.005	mA	Max number of driver in parallel, refer to Design-in Guide

## Isolation

U = Max. working voltage

Isolation per UL-8750	Input	Output	0-10V	Enclosure
Input	-	2U + 1kVac	2U + 1kVac	2U + 1kVac
Output	2U + 1kVac	-	2U + 1kVac	500Vac
0-10V	2U + 1kVac	2U + 1kVac	-	2U + 1kVac
Enclosure	2U + 1kVac	500Vac	2U + 1kVac	-


## Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as Tcase-max is not exceeded
Tcase-UL	90	°C	Max. temperature measured at T <sub>case</sub> -point
Tcase-life	85	°C	C10 = 50000 hours measured at T <sub>c</sub> -point

## Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase is Tcase-life

# XI085C240V054BST2

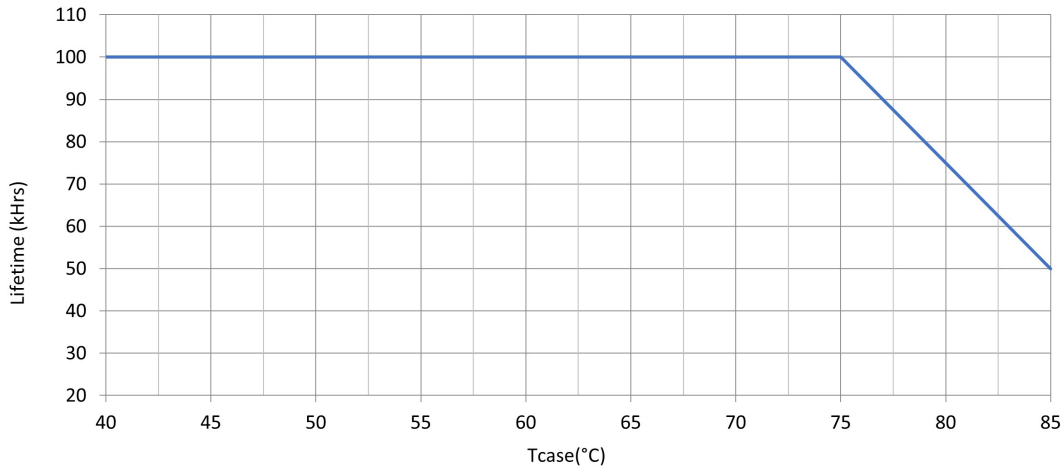

Maximum failures = 10%

## Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC, SimpleSet	1400 mA	
Driver Temperature Limit (DTL)	Yes		
Adjustable Light Output (ALO)	Yes		
Adjustable Light Output (ALO) min level	Yes		
Constant Light Output (CLO)	Yes		
0-10V	Yes		
Min Dim Level	Yes		
Dim to off	Yes		
End Of Life indicator (EOL)	Yes		
OEM Write Protection (OWP)	Yes		


## Non-programmable features

Specification item	Value	Condition
Open load protection	Yes	
Short circuit protection	Yes	
Over power protection	Yes	
Overtemperature protection	Yes	

# XI085C240V054BST2

## Inrush current

Specification item	Value	Unit	Condition
Inrush current	11.2	A	Input voltage 120V
Inrush current	29.4	A	Input voltage 277V
Inrush peak width	35.4	$\mu$ s	Input voltage 120 V, measured at 10% height
Inrush peak width	35.8	$\mu$ s	Input voltage 277 V, measured at 10% height

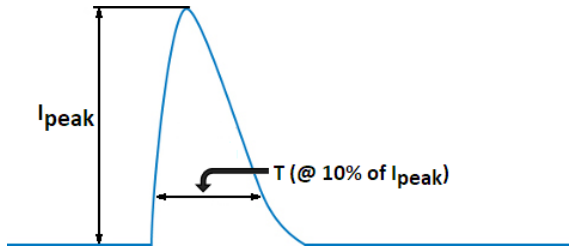

## Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	ANSI Surge Type 1.2/50 $\mu$ s Combi Wave (w/t 2ohm)
Mains surge immunity (comm. mode)	6	kV	ANSI Surge Type 1.2/50 $\mu$ s Combi Wave (w/t 2ohm)

## Approbation


Specification item	Value
Approval Marks / Agency Approbations	NOM / RoHS / UL Class P / UL Listed US & Can
EMI standards	FCC Title 47 Part 15; Class A
Environmental protection rating	UL damp & dry

# XI085C240V054BST2

## Graphs

### Operating window


---

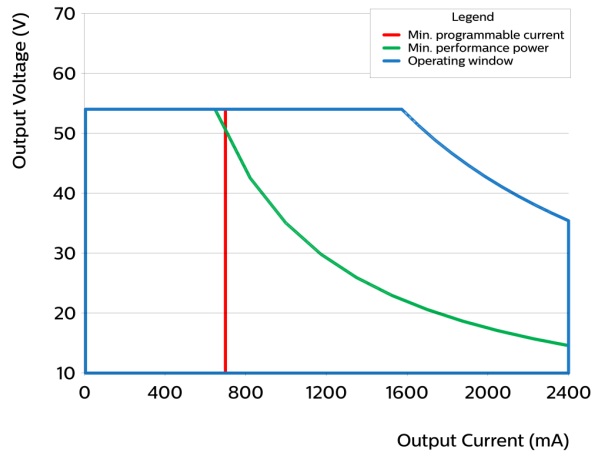

- Factory default output current is 1.4A.
- To get a 100% to 1% dimming range, the output current setting through AOC should be  $\geq 0.7A$ .
- Factory default minimum dimming is 1%. This can be adjusted between 1% and 100% using Advance MultiOne.

### Over Temperature Protection


---

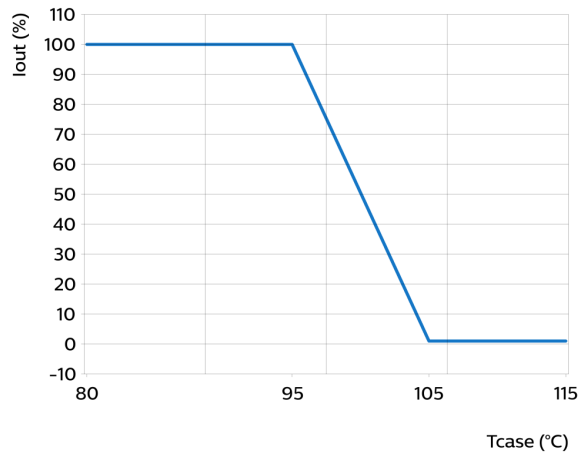


Adjustable via DTL with MultiOne Programming.

# XI085C240V054BST2

## Power factor versus output power


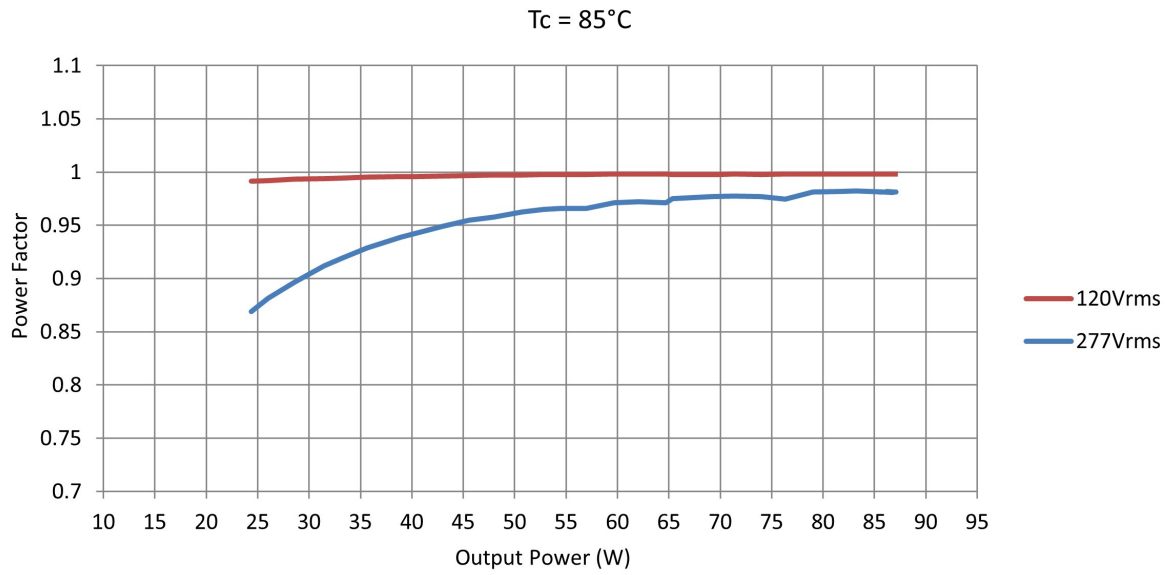


## THD versus output power


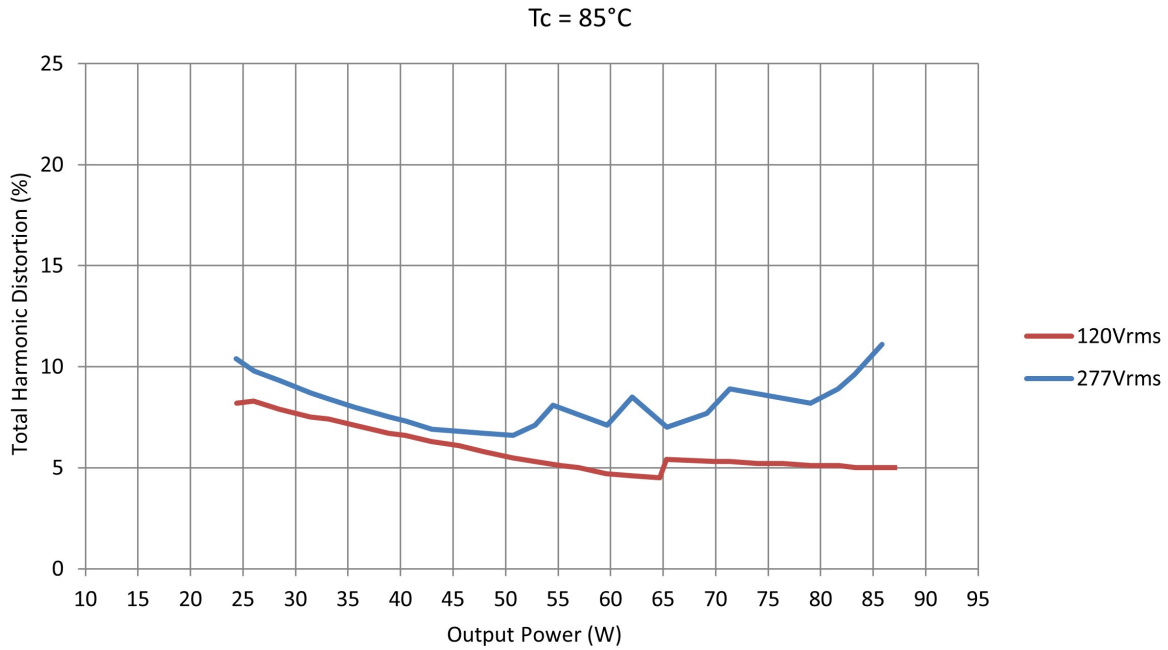


# XI085C240V054BST2

## I<sub>out</sub> as function of 0-10V interface

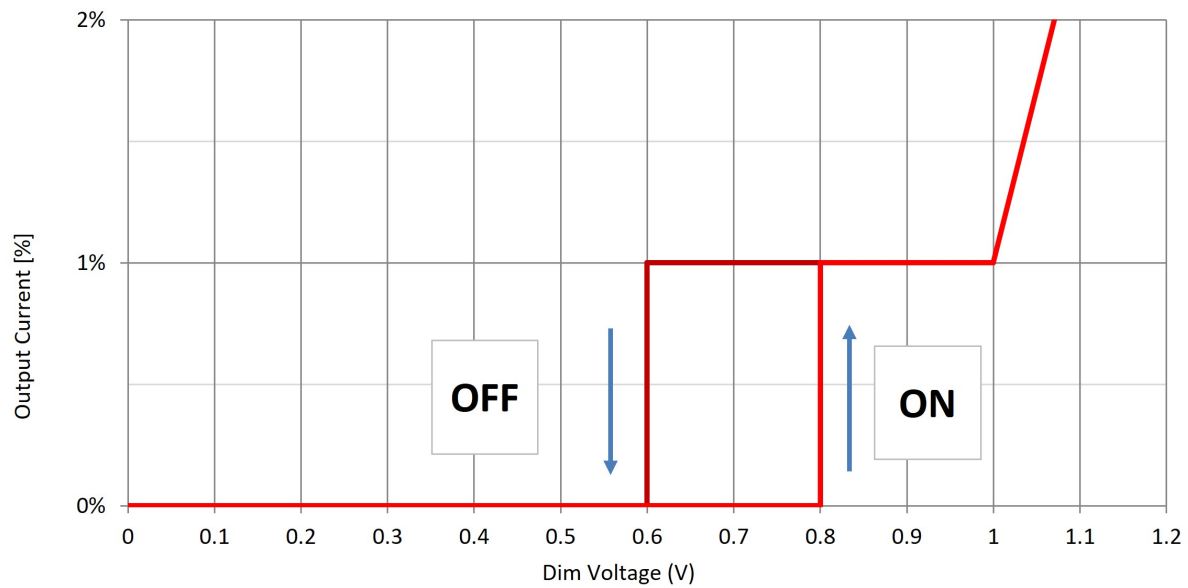
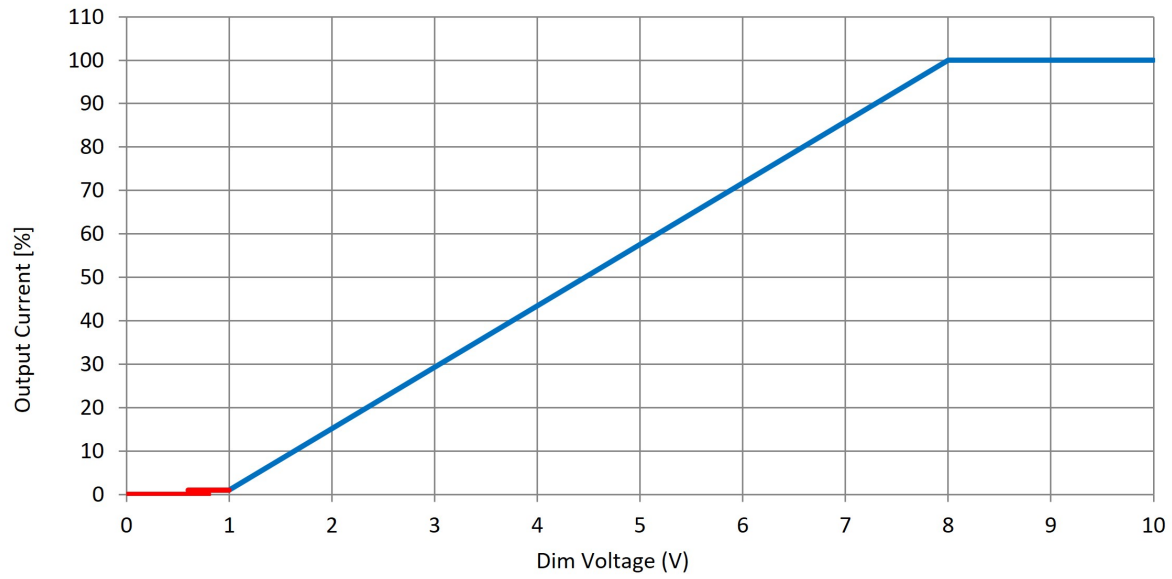


# XI085C240V054BST2

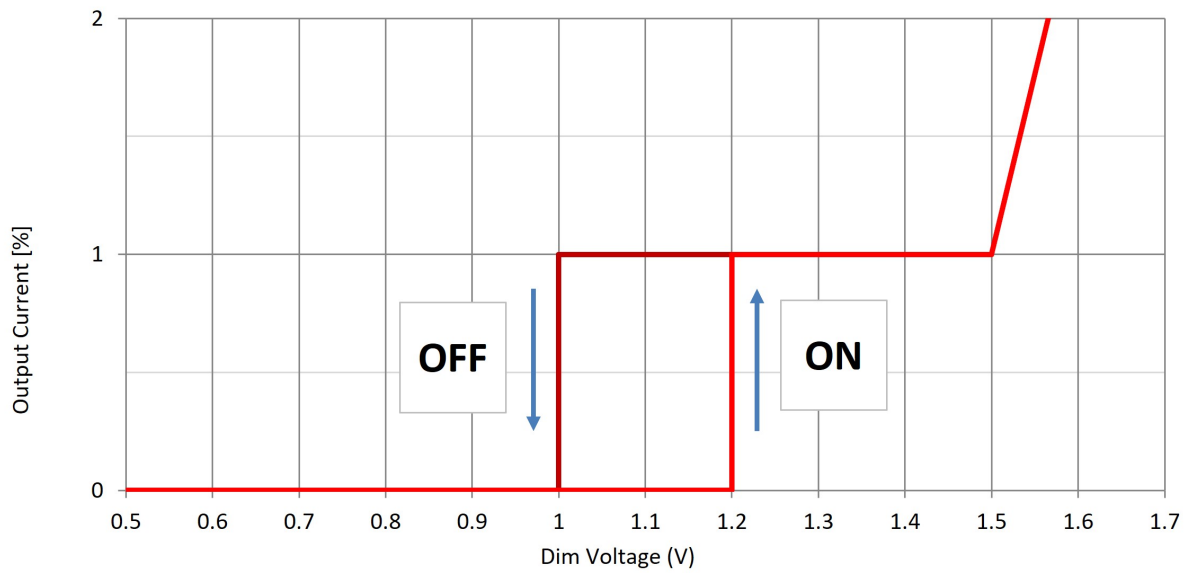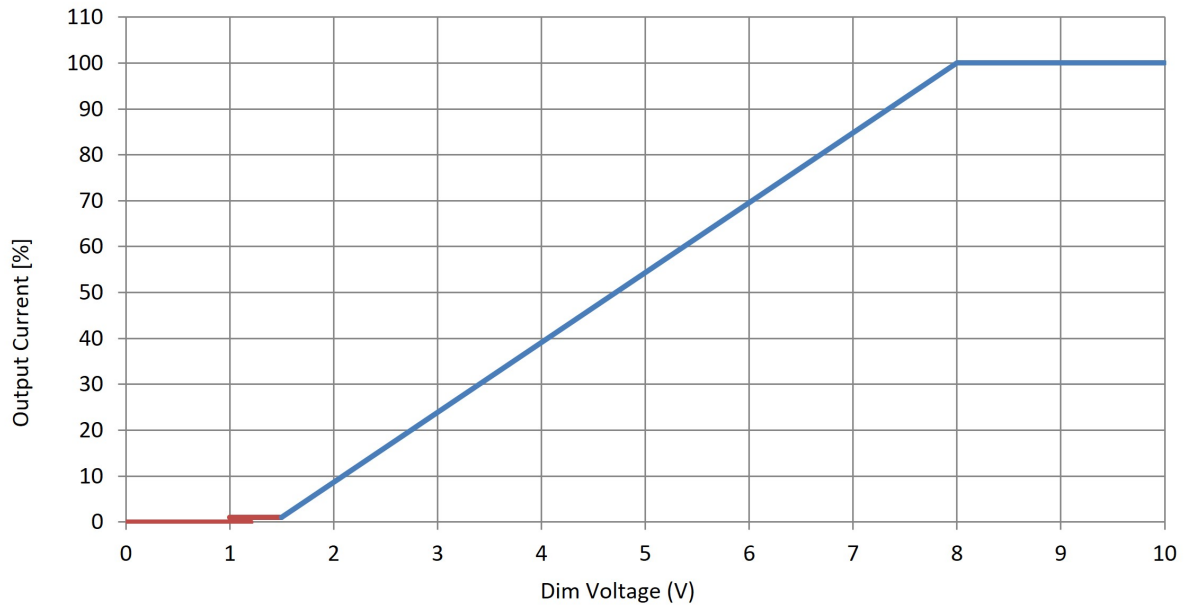

# XI085C240V054BST2

## Efficiency as function of $V_{out}$

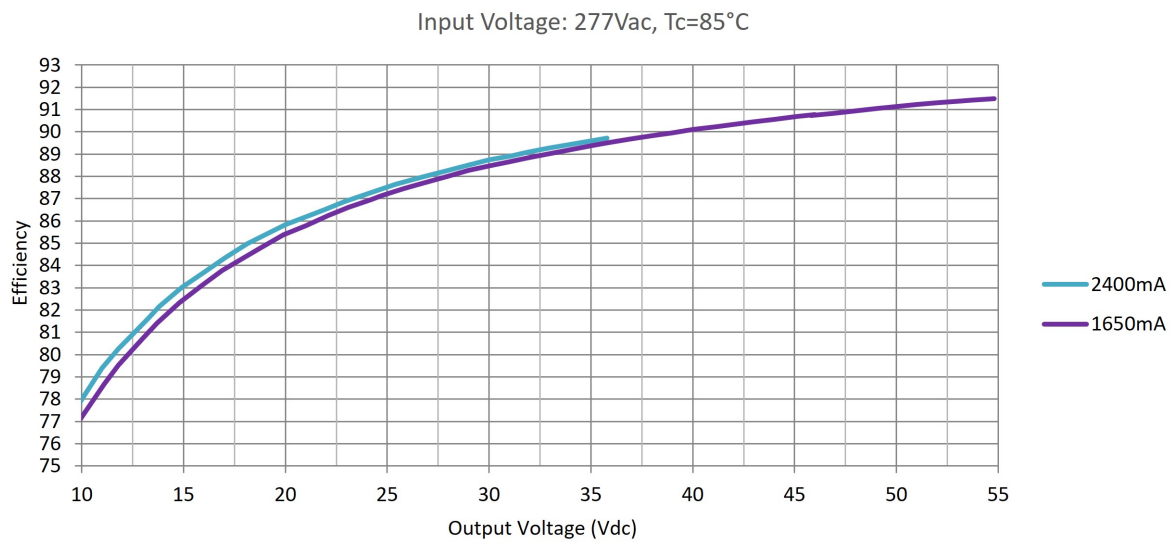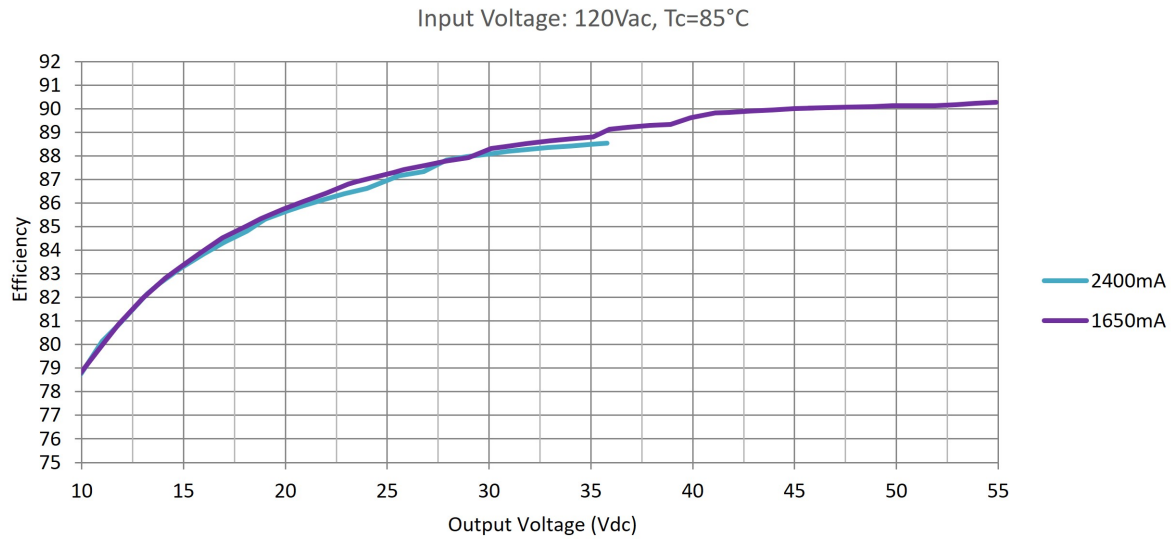

## Appendix

### Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit <a href="http://www.lutron.com/advance">www.lutron.com/advance</a> for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Philips	Sunrise - SR1200ZTUNV

## 0.6V Dim to Off (factory default)

Symbol	Parameter	Min	Typical	Max	Unit
Von	Turn on threshold	0.7	0.8	0.9	V
Voff	Turn off threshold	0.5	0.6	0.7	V
Ton	Turn on time		300		mS
Toff	Turn off time			1000	mS

## Dim to off function (traditional dimmer): 1.0V dim to off

Symbol	Parameter	Min	Typical	Max	Unit
Von	Turn on threshold	1.1	1.2	1.3	V
Voff	Turn off threshold	0.9	1	1.1	V
Ton	Turn on time		300		mS
Toff	Turn off time			1000	mS

