


TAPERITE™ TAPE LIGHT DIM TO WARM

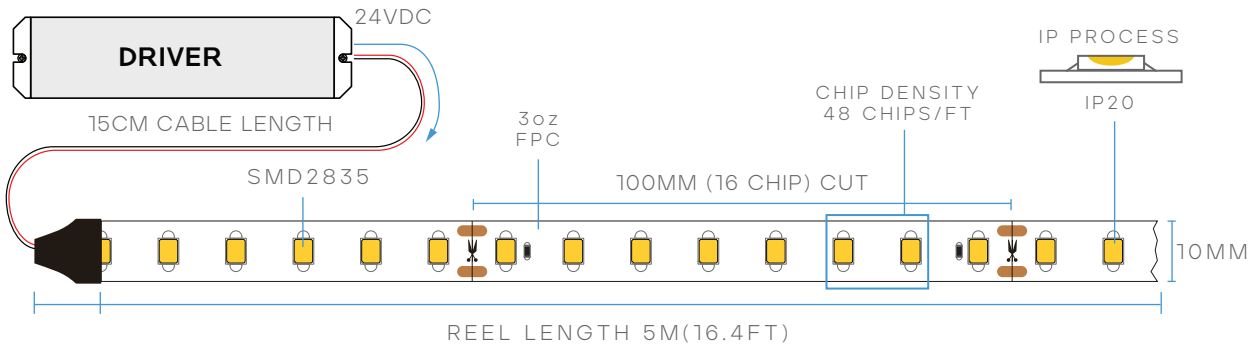

4W/FT

72W/REEL

IP-20

CRI 90

BEAM SPREAD 120°

24V

10MM

3oz FPC

16.4' REEL

UL US LISTED

MODEL	DESCRIPTION	COLOR (CCT)	LUMEN/FT	WATTAGE /FT	WATTAGE /REEL	EFFICACY
LR44208	LEDTL/2835/160/14.4/930-18DTW/IP20/24V/5M	1800~3000K	500	4W	72W	105lm/w

CHIP

CHIP:	SMD2835	WIDTH:	10MM
CHIP GROUP:	16	CHIP WATT:	0.2W
CUT SIZE:	100MM	CHIP QTY:	48/FT

INSTALLATION

ADHESIVE:	9448A 3M TAPE
CABLE LENGTH:	15CM
MAX. RUN:	5M/16.4FT

PACKAGING

CASE:	50 ROLLS
-------	----------

COMPATIBLE CONNECTORS




TAPE TO TAPE

LR44705 STANDARD
LR44800 HEAVY DUTY 10A




TAPE TO TAPE CORNER

LR44803 HEAVY DUTY 10A



TAPE TO CABLE

LR44707 STANDARD
LR44805 HEAVY DUTY 10A



TAPE TO CABLE TO TAPE

LR44709 STANDARD
LR44807 HEAVY DUTY 10A

COMPATIBLE CHANNELS *ALUMINUM CHANNEL REQUIRED FOR HEAT DISSIPATION



LR43100



LR43110



LR43120



LR43170



LR43190



LR43200



LR43210



LR43080



LR43090